


Revisions

Issue	Date	Note
1	17/12/2018	See note 525723354

ASSEMBLY VIEW

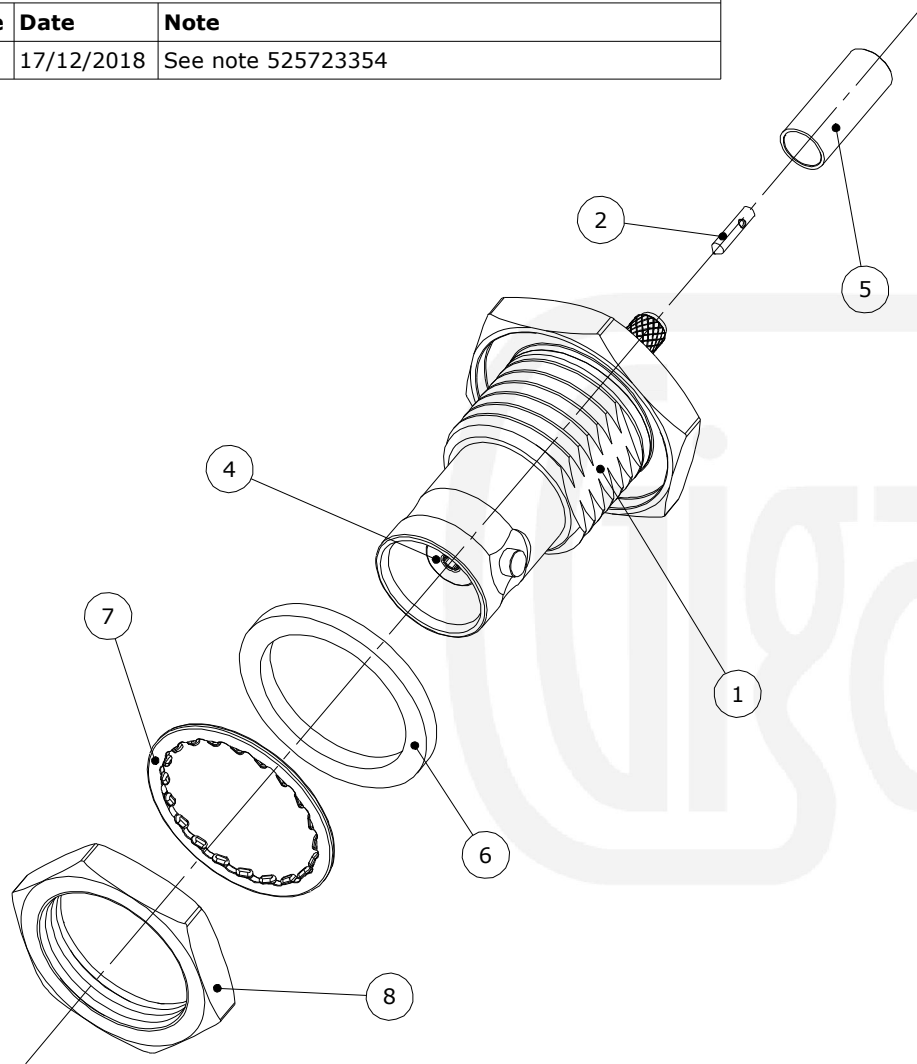


Assembly Instructions

1) Slide the ferrule onto the cable and strip the cable to the dimensions as shown, taking care not to nick the centre conductor or braid.



2) Crimp the pin onto the centre core and then slide the pin into the body until fully located, ensuring that the cable braid is on the outside of the connector mandril.

3) Slide the ferrule forward and crimp.

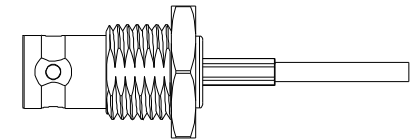


Crimp Hex. Sizes:

3.25mm Hex, 0.72mm Square

Strip Dimensions:

A=7.5mm, B=2.5mm, C=2.5mm



8	Locknut	Brass	Nickel
7	Washer	Brass	Nickel
6	O Ring	Rubber	Red
5	Ferrule	Brass	Nickel
4	Dielectric	PTFE	White
3	Contact	Brass	Gold
2	Pin	Brass	Gold
1	Body	Brass	Nickel
	Description	Material	Finish

Unless otherwise specified tolerances
 0.5-5 = ±0.2
 >5-30 = ±0.4
 >30-120 = ±0.6
 >120-315 = ±1.0
 >315-1000 = ±1.6
 Angles = ±5°
 Units = mm

This document is the confidential property of Gigatronix Limited and may not be copied, reproduced or transmitted to any third party without written authorisation.



Part Number BN02-3161-C06-31

Title: BNC Crimp Bulkhead Jack, Integral Contact, Nickel Plated, PTFE Dielectric, RG174, LBC100, RG316

Author	PJP
Drawn by	PJP
Drawing date	17/12/2018
Checked by	DB
Checked date	18/12/2018
Scale	Not to scale