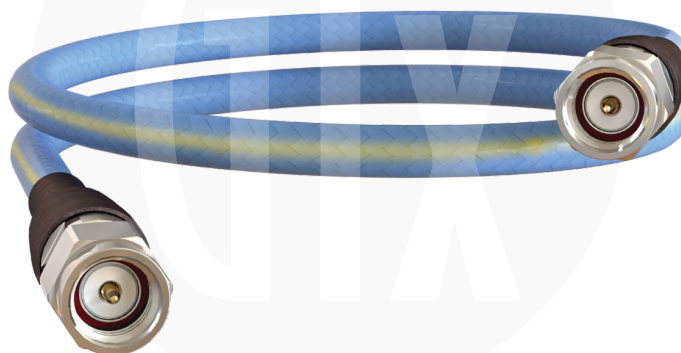


SMA Plug to SMA Plug, KF181HP Microwave Cable, 1220mm

181HPX-SMMSMM-1220**FEATURES**

- Suitable up to 26.5GHz
- Excellent Return Loss & Insertion Loss
- Ultra Low Loss, Phase Stable & Amplitude Stable
- 100% VNA Tested; supplied with serialised performance plots
- Heavy Duty Sleeving for Reliability and Robustness

**MATERIAL SPECIFICATION**

Cable Series	GTx KF181HP, Microwave Coaxial Cable
Connector 1	SMA Straight Plug, Stainless Steel
Connector 2	SMA Straight Plug, Stainless Steel
Length	1220mm (Tip to Tip)
Cable Overall Diameter	4.60mm
Armour	None

ELECTRICAL SPECIFICATION

Impedance	50 Ohms
Max. Frequency	26.5 GHz
VSWR	1.3 @26.5 GHz
Insertion Loss	3.0dB @26.5 GHz
Velocity of Propagation	76%
Voltage Withstanding	800V RMS Maximum
Shielding Effectiveness	> 90dB

MECHANICAL & ENVIRONMENTAL SPECIFICATION

Bending Radius (static)	23mm
Bending Radius (flexing)	46mm
Cable Weight	50 gms/m
RoHS Compliant	Yes
Temperature Range	-55 to +165 degrees C